


# ELECTROMAGNETIC LOCK

## MLSH SERIES - SURFACE MOUNTED

### ORDERING INFORMATION

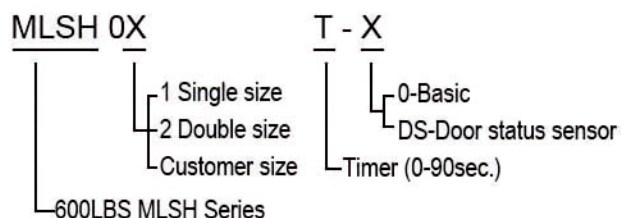

EXAMPLE :

- MLSH01-0 – Maglock 600P Basic
- MLSH02T – Maglock 600P\*2 w/Lock status sensor, Timer
- MLSH01T-DS – Maglock 600P w/Lock status sensor, Timer and Door status sensor

### SPECIFICATIONS

- Dimensions:  
Magnet (MLSH01)-250Lx47.2Wx26.6D mm  
Magnet (MLSH02)-500Lx47.2Wx26.6D mm  
Armature Plate - 185Lx38Wx12.5T mm
- Dual Voltage: 12/24VDC
- Current Draw: 500mA/12V, 250mA/24V
- Holding Force: about 600lbs
- Built-in voltage spike suppressor
- With Bi-color LED
- Anodized aluminum housing
- Adjustable mounting plate for easy and appropriate installation
- Special Finish: Zinc(on the magnet & armature plate)
- No residual magnetism
- The length can be added according to customer's requests




MLSH01 SERIES




MLSH02 SERIES

### BRACKETS & INSTALLATION

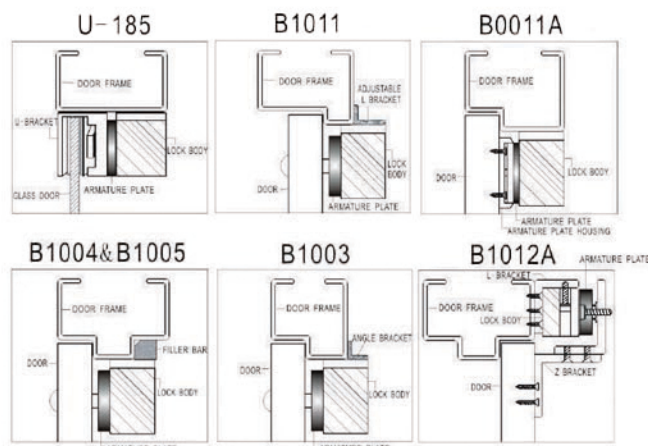

### APPLICATION

- Horizontal or vertical installation

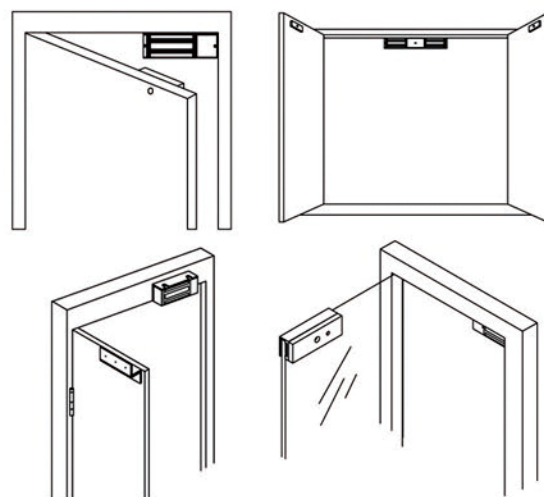

VGSE RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.