


Surface mount boxes are an integral part of the horizontal subsystems of SCS and are intended for connection of terminal equipment in workplaces. Structurally, the sockets can be made in two versions: as a complete solution with soldered RJ45 ports and IDC connectors and in the form of a plastic casing into which Keystone plug-in modules are separately installed.

The advantage of simple, empty enclosures is that not only RJ45 modules can be installed there, but also any others compatible with the Keystone format, incl. Telephone, optical and coaxial, in any desired configuration.

NIKOMAX Surface mount box- a simple and convenient solution for network installation. The assortment has 4 convenient models for 1, 2, 4 and 6 ports. Each data port of the outlets is equipped with an individual cover, which protects the contacts from the settling of dust.

On the housings there are additional breakable windows allowing cables to be brought from either side. For ease of administration on all covers there are areas for marking and for installing color icons.

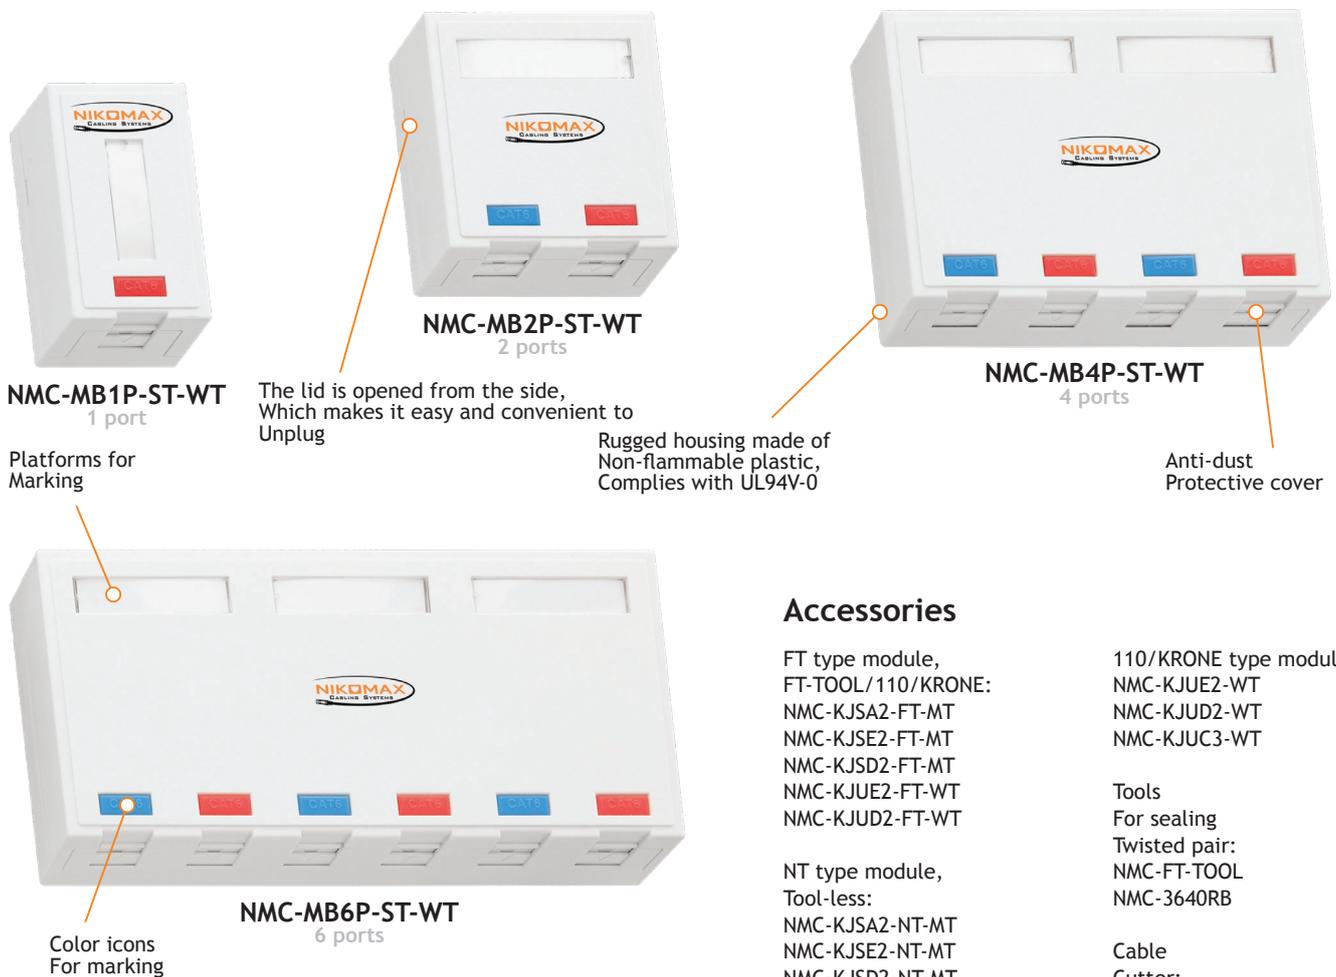

Accessories

FT type module,
FT-TOOL/110/KRONE:
NMC-KJSA2-FT-MT
NMC-KJSE2-FT-MT
NMC-KJSD2-FT-MT
NMC-KJUE2-FT-WT
NMC-KJUD2-FT-WT

NT type module,
Tool-less:
NMC-KJSA2-NT-MT
NMC-KJSE2-NT-MT
NMC-KJSD2-NT-MT
NMC-KJUE2-NT-WT
NMC-KJUD2-NT-WT

110/KRONE type module:
NMC-KJUE2-WT
NMC-KJUD2-WT
NMC-KJUC3-WT

Tools
For sealing
Twisted pair:
NMC-FT-TOOL
NMC-3640RB

Cable
Cutter:
NMC-502C
NMC-222

Ordering Table


	NMC-MB1P-ST-WT	NMC-MB2P-ST-WT	NMC-MB4P-ST-WT	NMC-MB6P-ST-WT
Socket Housing	1 pc.	1 pc.	1 pc.	1 pc.
Labels for marking	1 pc.	1 pc.	2 pcs.	3 pcs.
Set of colored icons	2 pcs.	2 pcs.	4 pcs.	6 pcs.
Cable tie	-	-	4 pcs.	6 pcs.
Sticky sticker	1 pc.	1 pc.	2 pcs.	2 pcs.
Screws	2 pcs.	2 pcs.	2 pcs.	2 pcs.

The manufacturer reserves the right to alter the appearance and characteristics of the product, without compromising the product's functionality

Specification

	NMC-MB1P-ST-WT	NMC-MB2P-ST-WT	NMC-MB4P-ST-WT	NMC-MB6P-ST-WT
Number of ports	1	2	4	6
Type of installed modules	Keystone			
Protective covers	Yes			
Marking	Color icons and additional windows for marking			
Plastic material	Complies with UL94V-0			
Color	White			
Installation	Wall			
Dimensions, WxHxD	40x70x30 mm	66x70x30 mm	118x85x30 mm	170x85x30 mm
Temperature ranges	Storage from -40 to +70°C. Installation from 0 to +50°C. Operation from -10 to +60°C			
Warranty	1 year			
Packaging	Individual - Plastic bag			

Break-out windows for cables from any convenient side, including from the wall (the sockets for 4 and 6 ports are located on the lid, And there are additional windows for cable output from the rear)

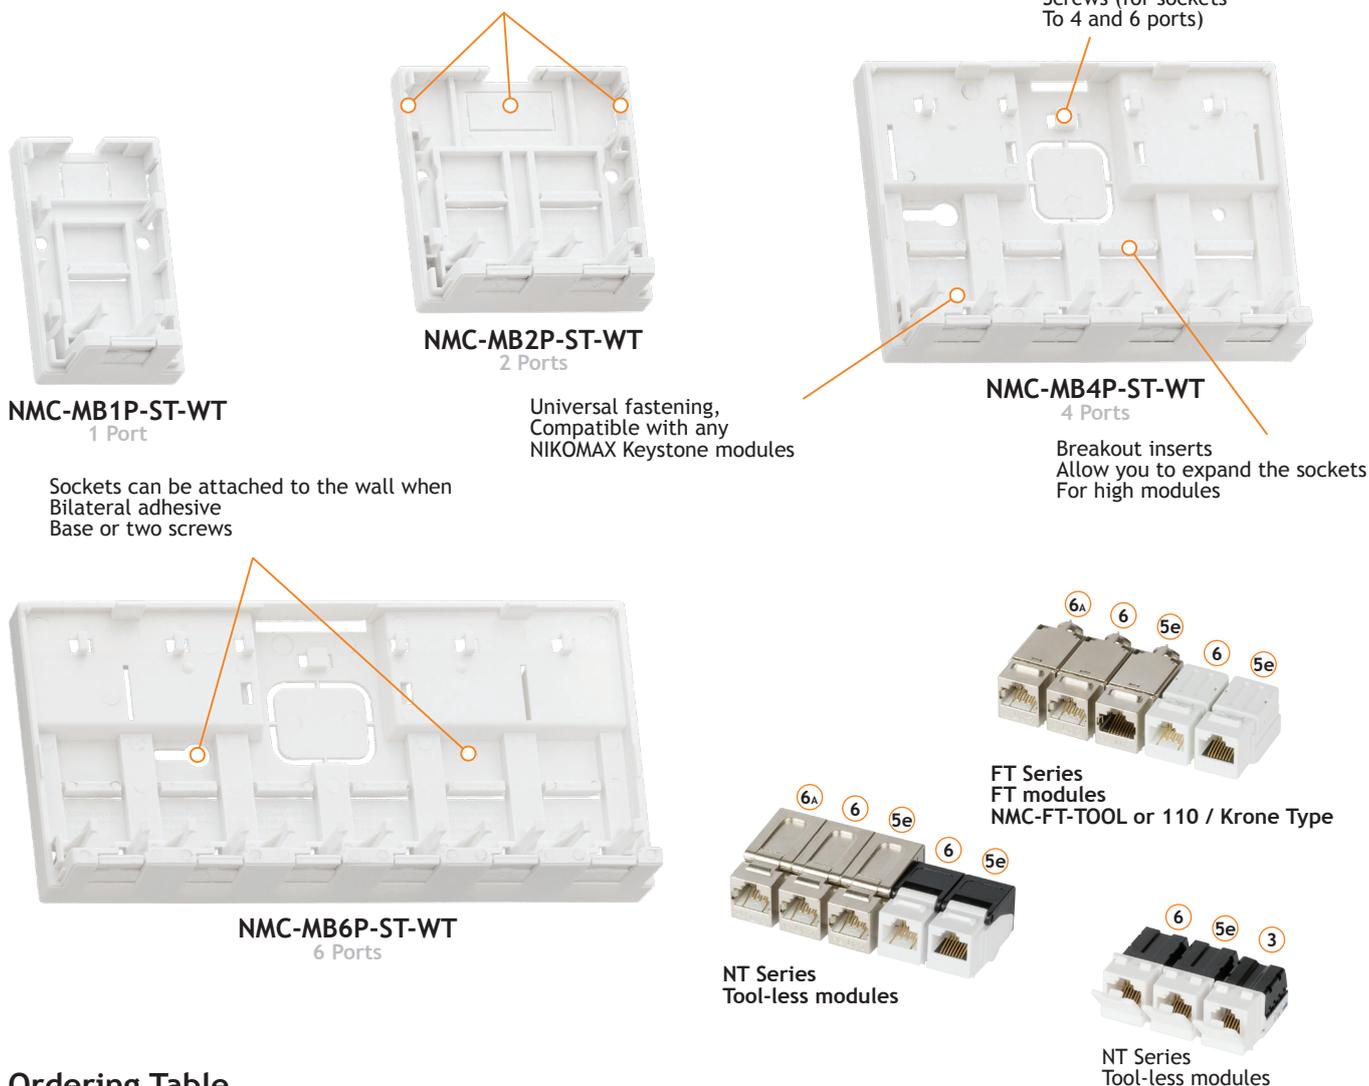

Ordering Table

Part Number	Ports	Individual package		Collective package			Freight package		
		Volume, m3	Weight, kg	Q'ty	Dimensions, mm	Weight, kg	Q'ty	Dimensions, mm	Weight, kg
NMC-MB1P-ST-WT	1	0.00009	0.032	50 pcs.	250x190x210	1.9	200 pcs.	515x400x230	8.2
NMC-MB2P-ST-WT	2	0.00015	0.044	32 pcs.	250x190x210	1.8	140 pcs.	515x400x230	8.0
NMC-MB4P-ST-WT	4	0.00032	0.076	20 pcs.	250x190x210	1.8	80 pcs.	515x400x230	7.9
NMC-MB6P-ST-WT	6	0.00045	0.116	12 pcs.	250x190x210	1.7	48 pcs.	515x400x230	7.4

The manufacturer reserves the right to alter the appearance and characteristics of the product, without compromising the product's functionality