

NMF-RP24SC-TS-P-1U-BK

NIKOMAX 19 " fiber distribution unit, 1U, for 24 Simplex SC adapters or 48 Simplex LC adapters, sliding type, with shelf, black

- Retractable structure
- With front shelf
- Port marking

Rack Mount Fiber Distribution Unit (FDU) are designed for switching optical fibers, in particular to create a detachable connection between optical cords connected to active equipment and terminated with fiber optic cables.

Optical cables are built into the FDU and terminated with the necessary connectors by welding with pigtailed. To protect the joints and lay the stocks of fiber lengths, special splice cassettes and heat shrink sleeves are used. The connection of the terminated cable to the patch cords takes place through the optical pass-through adapters, which are installed in the removable panels on the front part of the FDU.

Rack Mount Fiber Distribution Unit (FDU) **NMF-RP24SC-TS-P-1U-BK** is designed for mounting in a switching 19 " cabinet or rack. FDU body is made of steel and reliably protects fibers from external mechanical impact and foreign objects getting inside.

FDU has 4 cable entries on the rear wall and, accordingly, 4 nodes for mounting cable. A feature of this FDU is a retractable design that provides easy access to the contents of the FDU. There is also a front shelf and inside the FDU for convenience, the organizer is located.



NMF-RP24SC-TS-P-1U-BK

Package Content

Part Number	NMF-RP24SC-TS-P-1U-BK
FDU	1 pc.
Cable organizer	2 pc.
KDZS sleeves	48 pcs.
Screed Kit	1 pc.
Splice - cassette	2 pcs.
Cover for splice cassettes	1 pc.


Specification

Part number	NMF-RP24SC-TS-P-1U-BK
Materials	Steel 1.2 mm
Type of adapters for installation	Simple SC / Duplex LC
Maximum number of ports	24 Simplex SC / 48 Simplex LC / 24 Duplex LC
Design	Extendable with front shelf
Maximum cable diameter, mm	12
Color	Black
Installation	19 "Rack or Cabinet
Temperature ranges	Storage from -20 to +65° C. Operation from -20 to +65° C
Packaging	Individual - Cardboard box
Warranty	1 year

Ordering Table

Product Number	Color	Number of ports	Individual packing	
			volume, m3	Weight kg
NMF-RP24SC-TS-P-1U-BK	Black	24 SC / 48 LC	-	-

Additional Photos

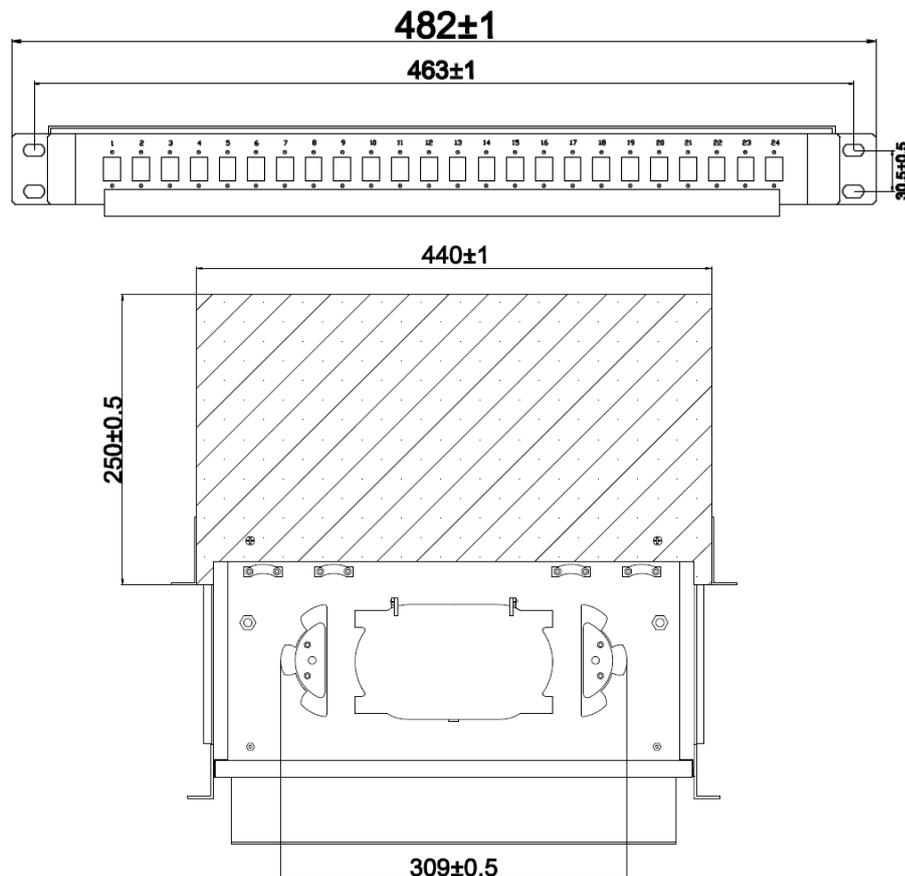

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties